

9939 Via Pasar | San Diego, CA 92126  
 TEL: (858) 621-2700 | FAX: (858) 621-2722  
 URL: [www.zcomm.com](http://www.zcomm.com)  
 EMAIL: [applications@zcomm.com](mailto:applications@zcomm.com)


### Voltage-Controlled Oscillator Surface Mount Module

#### Applications

- Microwave Radios
- Satellite Communications
- Direct Broadcast

#### Application Notes

- AN-101: Mounting and Grounding
- AN-102: Output Loading
- AN-107: Manual Soldering

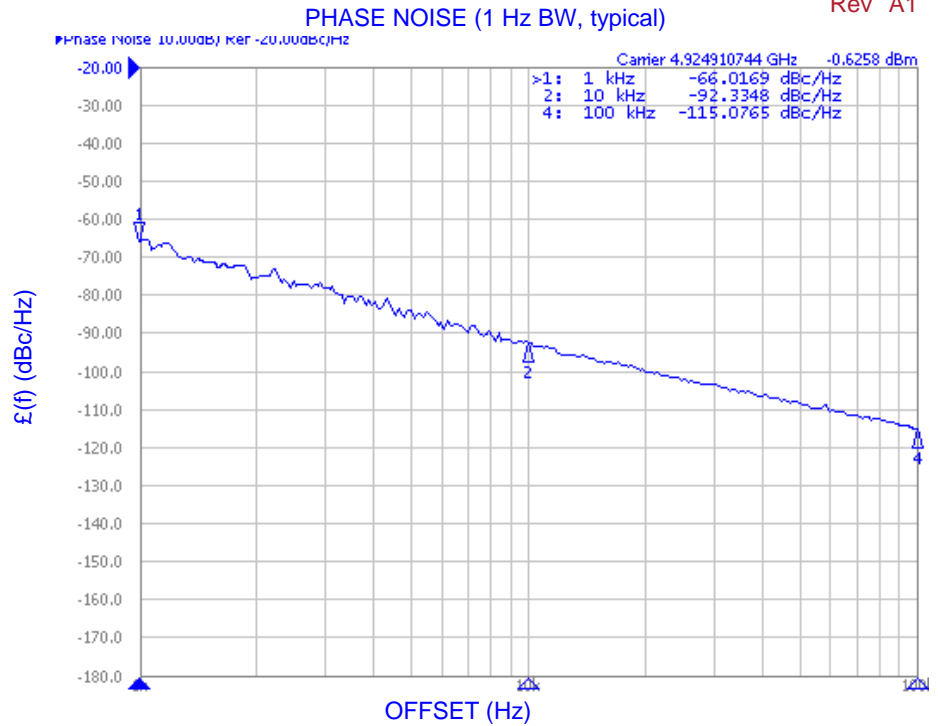

#### Performance Specifications

|  | Min        | Typ | Max  | Units              |
|--|------------|-----|------|--------------------|
| Oscillation Frequency Range            | 4750       |     | 5100 | MHz                |
| Phase Noise @ 10 kHz offset (1 Hz BW)  |            | -92 |      | dBc/Hz             |
| Harmonic Suppression (2nd)             |            | -20 |      | dBc                |
| Tuning Voltage                         | 0.5        |     | 14   | Vdc                |
| Tuning Sensitivity (avg.)              |            | 36  |      | MHz/V              |
| Power Output                           | 3          | 6   | 9    | dBm                |
| Load Impedance                         |            | 50  |      | $\Omega$           |
| Input Capacitance                      |            |     | 50   | pF                 |
| Pushing                                |            |     | 5    | MHz/V              |
| Pulling (14 dB Return Loss, Any Phase) |            |     | 15.4 | MHz                |
| Operating Temperature Range            | -40        |     | 85   | $^{\circ}\text{C}$ |
| Package Style                          | MINI-14S-L |     |      |                    |

#### Power Supply Requirements

|                            | Min | Typ | Max | Units |
|----------------------------|-----|-----|-----|-------|
| Supply Voltage (Vcc, nom.) |     | 10  |     | Vdc   |
| Supply Current (Icc)       |     | 21  | 25  | mA    |

#### Additional Notes

LFSuffix = RoHS Compliant. All specifications are subject to change without notice.

